


# Radio Description

## Street Radio 4408

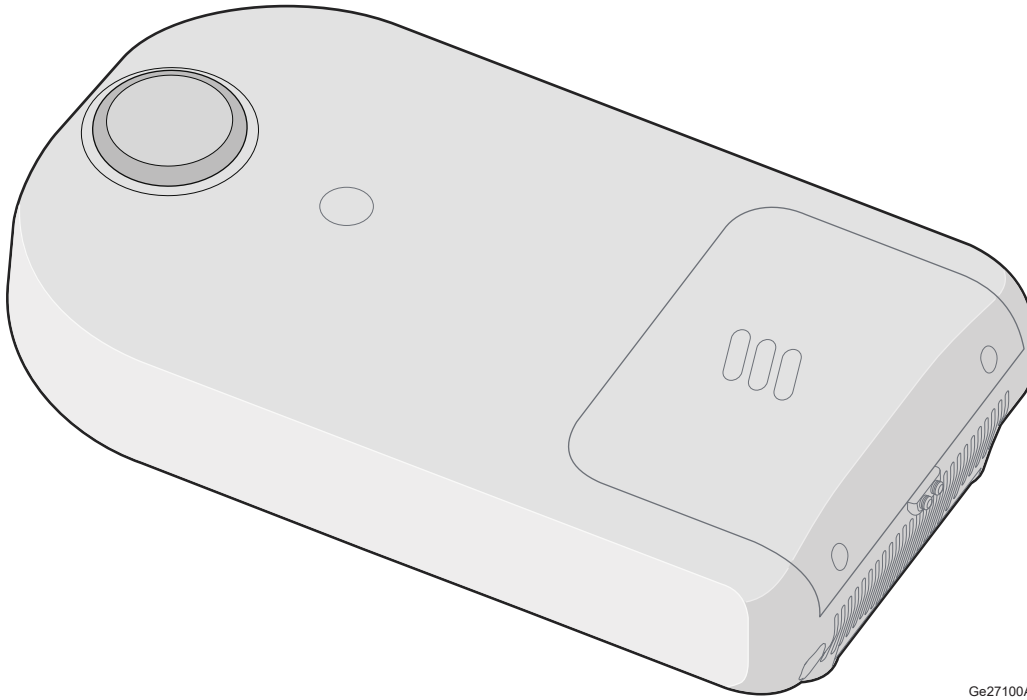

Ge27100A

## Contents

### Introduction

- Warranty Seal

### Product Overview

- Main Features
- Optional Equipment

### Technical Data

- Radio Capabilities
- Output Power
- Physical Characteristics
- Antenna
- Installation Recommendations
- Space Requirements
- Acoustic Noise
- Environmental Characteristics
- Power Characteristics
- System Characteristics

### Hardware Architecture

- Support 6525
- Radio 4408
- Antenna

### Connection Interfaces

Radio 4408

**Standards and Regulations**

Regulatory Approval

Other Standards and Regulations

---

# 1 Introduction

## 1.1 Warranty Seal

The product is equipped with a warranty seal sticker.

**Note:** Seals that have been implemented by Ericsson must not be broken or removed, as it otherwise voids warranty.

## 2 Product Overview

The radio expands coverage and performance in denser urban areas, where the use of small handheld devices demand high capacity on the operator networks. It can be mounted on top of luminaires in cities and in demanding radio environments.

The radio is part of a modular radio building concept that is easy to expand. The small size of the radio together with the mounting solution reduces the site volume. The low weight improves the handling of the radio.

An optic cable connects the radio to the main unit, or to an expanded Radio System.

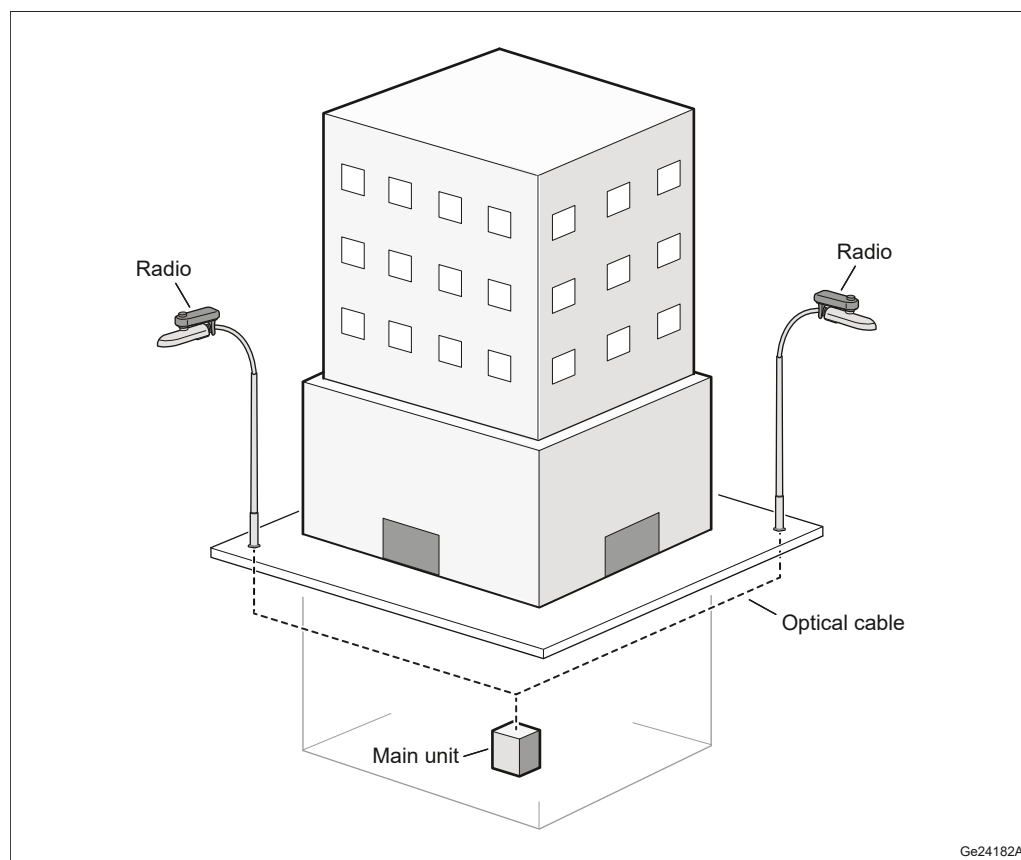


Figure 1 Radio Installations

### 2.1 Main Features

The following are the main features of the radio:

- NR TDD, LTE TDD
- Duplex transmitter/receiver (4TX/4RX) branches with 5 W per branch
- Up to 10.1 Gbps CPRI (optical)
- Complies with 3GPP base station classes Medium Range

For a list of relevant standards, see [Radio Standards Compliance](#).

### 2.2 Optional Equipment

There is no optional equipment for use with Street Radio 4408.

## 3 Technical Data

### 3.1 Radio Capabilities

For supported number of carriers, carrier bandwidth, operating bandwidth, IBW, frequency range, detailed RAT support, see Supported Radio Capabilities.

### 3.2 Output Power

For maximum nominal output power, see Supported Radio Capabilities.

Minimum configured output power where performance is guaranteed is 0.25 W.

For detailed information on licenses and HWACs, see the following:

- LTE, NR: Hardware-Related Capabilities in the Radio Node libraries

For information on maximum output power per carrier type, see Radio Node Configurations.

### 3.3 Physical Characteristics

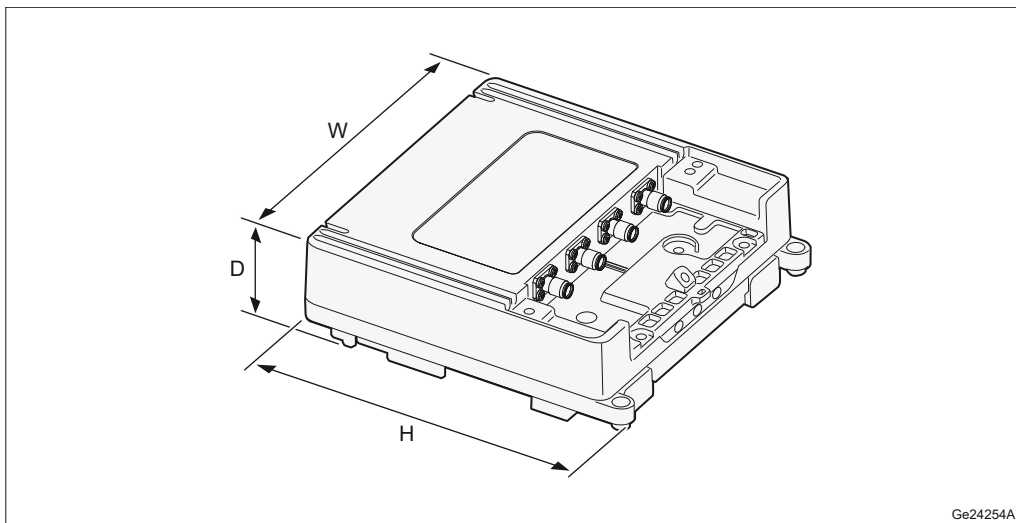


Figure 2 Radio 4408 Dimensions

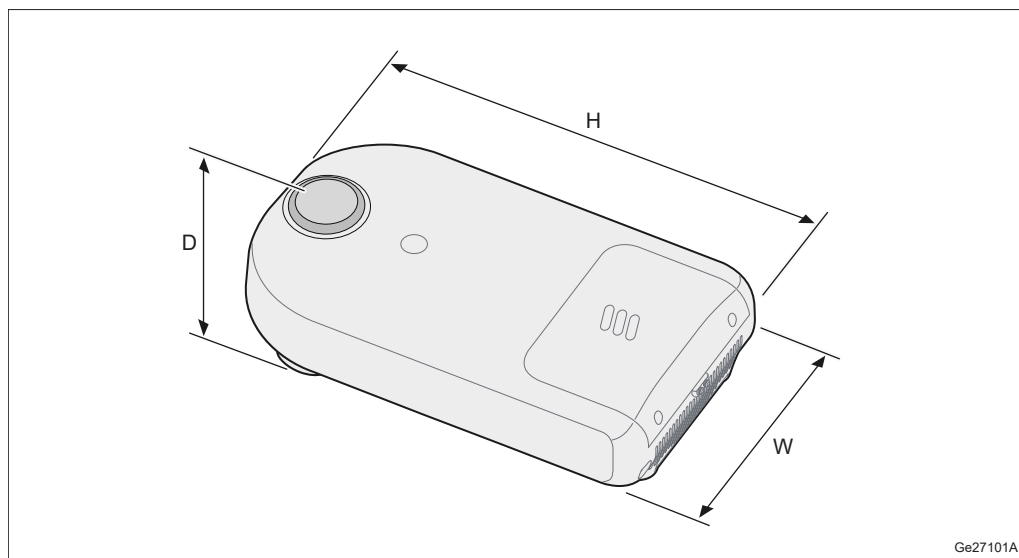


Figure 3 Support 6525 Dimensions

Table 1 Street Radio 4408 Dimensions

Product	Height, H (mm)	Width, W (mm)	Depth, D (mm)
Radio 4408 B77G	214	200	68
Support 6525	414	239	249 <sup>(1)</sup>

(1) With clamp

Table 2 Street Radio 4408 Weight

Product	Unit Weight (kg)
Radio 4408 B77G	3.25
Support 6525	3.58 4.08 <sup>(2)</sup>

(2) With clamp

Table 3 Street Radio 4408 Color

Part	Color Code
Radio 4408 Body	NCS S 1002-B
Support 6525 Body	NCS S 1002-B

## 3.4 Antenna

Table 4 Antenna Data

Antenna	Band	Frequency	Maximum Gain
Integrated omnidirectional antennas 6525	77G	3.3–3.98 GHz	B77G: ≤5 dBi

## 3.5 Installation Recommendations

To ensure reliable operation and maximum performance, an appropriate installation location must be chosen.

If possible, do not install the unit on a luminaire that is directed toward elements that can disturb the radio signals.

### 3.5.1 Installation Locations to Avoid

Although Ericsson declares this product designed for outdoor environments, avoid installing the unit in a potential microclimate location. Typical examples of microclimate locations are sites where the product is not only exposed to the surrounding temperature, but additional temperature as heat from dark-colored planes, for example, reflections from the street asphalt or walls. The additional temperature can generate heat traps with temperatures up to 10°C higher than expected.

Avoid installing equipment in the following locations:

- Near the exhaust of building ventilation systems
- Near the exhaust of chimneys
- Opposite large surfaces made of glass or new concrete

If the unit is to be located in an environment subjected to lightning strike, an external Surge Protection Device (SPD) is needed.

### 3.5.2 Other Considerations

Installing the radio near other electronic equipment can cause interference.

For sites with risk of ground fire, the recommended minimum installation height is 3 m.

### 3.5.3 Painting Disclaimer

Ericsson recommends to not paint the product as it can affect performance of the product.

Ericsson applies limitations to the warranty and service contract if the product is painted.

If the product is painted, the following commercial limitations apply:

- Failure modes directly related to overheating because of painting are not valid for repair within the scope of the warranty or standard service contract.
- Product failures related to paint contamination of components of the unit are not valid for repair within the scope of warranty or standard service contract.
- When a painted unit is repaired, it might be restored to the standard color before being returned to the market. It is not possible to guarantee that the same unit is sent back to the same place. This is also valid for units repaired under a service contract.
- For repairs within the warranty period or a standard service contract, the customer is charged the additional costs for replacing all painted parts of the unit or the complete unit.

If adaptations are required, contact Ericsson for information.

## 3.6 Space Requirements

### 3.6.1 Generic Requirements

Street Radio 4408 can be mounted as a single unit on top of a luminaire.

## 3.7 Acoustic Noise

The acoustic noise depends on the surrounding temperature, as listed below.



Table 5 Maximum Sound Pressure Level (dBA) for Street Radio 4408 with Integrated Fan

Temperature (°C)	Street Radio 4408 Sound Pressure Level (dBA) at 1-meter Distance <sup>(1)</sup>
<+20	41.0
+30	44.0
+40	47.0
+55	52.0

(1) The sound pressure level is measured at hemispherical distribution.

## 3.8 Environmental Characteristics

This section contains operating environment data for the radio.

### 3.8.1 Operating Environment

The following are the values for the normal operating environment of the radio:

Table 6 Operating Environment

Description	Value
Temperature <sup>(1)</sup>	-40°C to +55°C
Solar radiation	≤1120 W/m <sup>2</sup>
Relative humidity	5–100%
Absolute humidity	0.26–40 g/m <sup>3</sup>
Maximum temperature change	0.5°C/min
Maximum wind load at 42 m/s (pole-installed single unit)	
Street Radio 4408 B77G	72 N (front/back), 88 N (side)

(1) Depending on product variant, installation scenario, traffic load, and configuration, the product can, in the highest 15°C temperature range, temporarily reduce the output power by <2 dB. This depends on the durations of the high ambient temperature.

### 3.8.2 Heat Dissipation

The radio has a fan and is designed for outdoor installation.

Avoid indoor installation in a room without sufficient ventilation and cooling.

The maximum heat dissipation is calculated using the following formula:

$$\text{Max Heat Dissipation} = \text{Max Power Consumption} - \text{Configured Output Power}$$

Heat dissipation can be calculated for different traffic loads using values from Power Consumption Data. For more information, see Power Consumption Calculations.

### 3.8.3 Vibration

The radio operates reliably during seismic activity as specified by test method IEC 60068-2-57 Ff.

Table 7 Street Radio 4408 Seismic Vibration Activity

Characteristic	Value
Maximum level of Required Response Spectrum (RRS)	50 m/s <sup>2</sup> within 2–5 Hz for DR=2%

Characteristic	Value
Frequency range	0.3–50 Hz
Time history signal	Verteq II

The radio operates reliably during random vibration as specified by test method IEC 60068-2-64 Fh method 1.

Random vibration, normal operation	+12 m <sup>2</sup> /s <sup>3</sup>	0.3 m <sup>2</sup> /s <sup>3</sup>	-12 m <sup>2</sup> /s <sup>3</sup>
Frequency range	5–10 Hz	10–50 Hz	50–150 Hz

### 3.8.4 Materials

All Ericsson products fulfill the legal and market requirements regarding the following:

- Material declaration
- Materials' fire resistance, components, wires, and cables
- Recycling
- Restricted and banned material use

## 3.9 Power Characteristics

This section describes the power supply requirements, power consumption, and circuit breaker recommendations for the radio.

### 3.9.1 AC Power Characteristics

The power supply voltage for Radio 4408 is +36 V DC, provided by the Support unit.

Table 8 Street Radio 4408 AC Power Supply Requirements

Conditions	Values and Ranges
Nominal voltage	110–480 V AC
Normal voltage range at radio input connector	110–480 V AC
Non-destructive range	0–528 V AC

### Circuit Breaker Recommendations

The recommendations given in this section are based on peak power consumption and give no information on power consumption during normal operation.

Table 9 Radio Circuit Breaker Recommendations

Unit (DC Powered)	Output Power (W)	Minimum CB Rating (A)	Maximum Allowed CB Rating <sup>(1)</sup> (A)
Street Radio 4408 B77G	4 × 5	16	16

<sup>(1)</sup> The absolute maximum circuit breaker class according to radio design restrictions.

### 3.9.2 Power Consumption

For information on power consumption, see Power Consumption Calculations and Power Consumption Data.

## 3.10 System Characteristics

This section describes the system characteristics of the Radio System.

### 3.10.1 RF Electromagnetic Exposure

For general information about RF EMF exposure, see Radio Frequency Electromagnetic Fields.

The following tables list the compliance boundaries (exclusion zones), outside of which the RF EMF exposure from Street Radio 4408 is below the limits specified by the FCC and the limits applicable in:

- USA (47 CFR 1.1310)

Table 10 Compliance Distance for General Public (GP) and Occupational (O) Exposure Applicable in USA and Markets Employing the FCC RF Exposure Limits (Including 0.6 dB Power Tolerance)

Product	Standard	Maximum Nominal Output Power from the Radio	IEC 62232 Installation Class	Compliance Distance <sup>(1)</sup> (m)	
				GP	O
Street Radio 4408 B77G	LTE / NR	4 × 5 W	E+	1.6	0.7

(1) The compliance distances are determined for maximum nominal output power with power tolerance and TDD downlink duty cycle included.

### 3.10.2 Software

For information on software dependencies, see Supported Radio Capabilities.

### 3.10.3 Radio Configurations

For information about available radio configurations, see Radio Node Configurations.

# 4 Hardware Architecture

For a description of the supported radio configurations, see Radio Node Configurations.

**Note:** The Radio 4408 and Support 6525 units are separately replaceable when faulty.

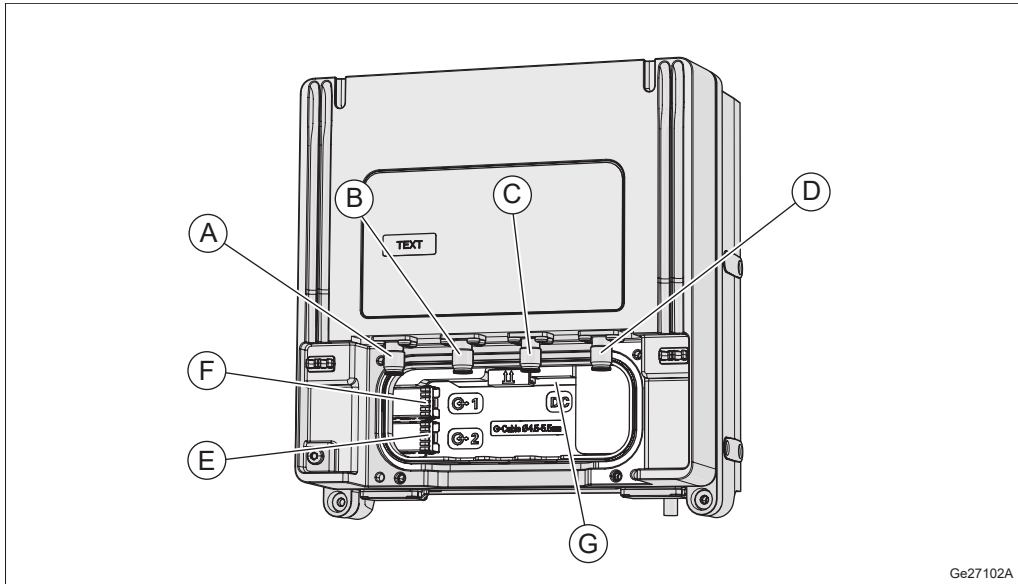


Figure 4 Radio 4408

Table 11 Key to Radio Components

Position	Component
A–D	Antenna ports A–D
E	Optical cable 2
F	Optical cable 1
G	DC power supply

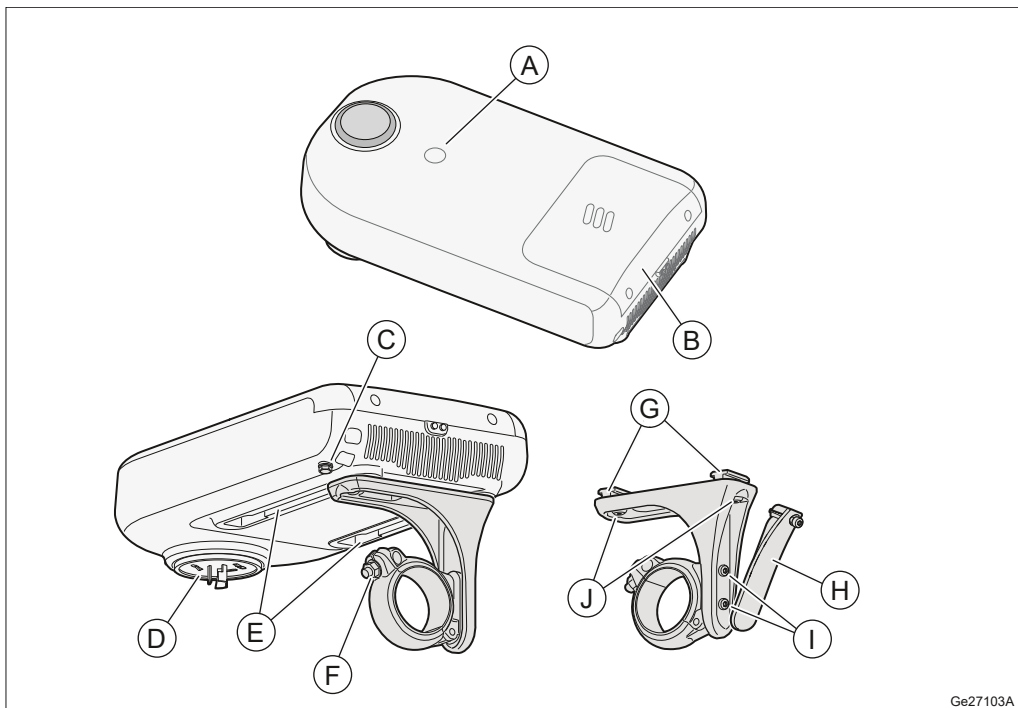


Figure 5 Support 6525

Table 12 Key to Support Components

Position	Component
A	ALS sensor
B	Utility access cover
C	Grounding screw
D	Bottom NEMA plug
E	Mounting rails
F	Swivel locking nut
G	Shuttles
H	Clamp adjustment cover
I	Vertical adjustment screws
J	Horizontal adjustment screws

## 4.1 Support 6525

Support 6525 provides Radio 4408 with integrated mechanical attachment, AC power conversion, and cooling. It consists of four integrated antennas, a utility control board, a mounting bracket, a fan unit, and a PSU.

### 4.1.1 Mounting Bracket

The mounting bracket provides an integrated mechanical attachment for mounting the support on top of a luminaire pole with 2 3/8" (60 mm) diameter. Poles with a smaller diameter require a suitable engineering design that fulfills the local specifications.

### 4.1.2 Fan Unit

The fan unit is integrated in Support 6525 and operates autonomously against ambient temperature to cool Radio 4408.

### 4.1.3 PSU

The PSU is integrated in Support 6525 and provides DC power to Radio 4408 and the fan unit.

## 4.2 Radio 4408

Radio 4408 handles the radio communication in the unit and consists of a thermal radiator, TRX, and filter unit.

The antenna supervision can detect the following disconnected antennas:

- Integrated Omnidirectional Antennas

Use the AILG feature to ensure sufficient transmitted power.

### 4.2.1 Thermal Radiator

The thermal radiator provides cooling to the radio.

### 4.2.2 TRX

The Transmitter and Receiver (TRX) provides the following:

- Analog/Digital (A/D), Digital/Analog (D/A) conversion
- Channel filtering
- Delay and gain adjustment
- RF modulation and demodulation
- Optical cable interface termination
- Control and surveillance

### 4.2.3 Filter Unit

The Filter Unit consists of band-pass filters.

## 4.3 Antenna

The antennas are integrated in the Support 6525 unit.

# 5 Connection Interfaces

This section contains information about the radio connection interfaces.

## 5.1 Radio 4408

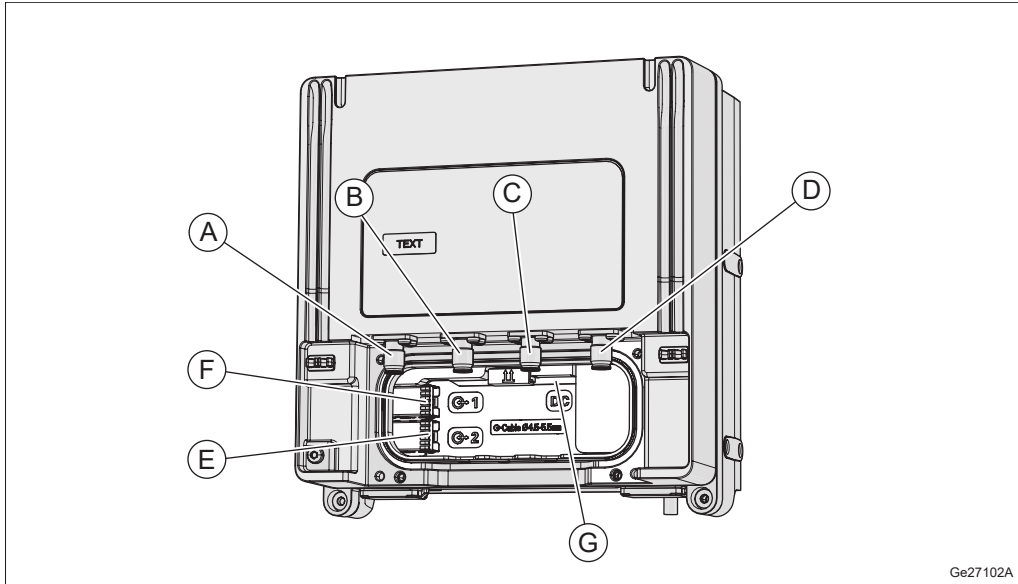


Figure 6 Radio 4408 Connection Interfaces

Table 13 Connection Interfaces

Position	Description	Marking	Connector Types	Cable Illustration
A	Antenna A		NEX10	
B	Antenna B			
C	Antenna C			
D	Antenna D			
E	Optical cable 2		LC (on SFP)	
F	Optical cable 1 Note: It must be used first in default configuration.			
G	DC power supply and internal communication	DC	-	-





### 5.1.1 Antenna Interface

The antenna interfaces provide connections for the radio to the antennas. RF cables connect the radio to the antennas.



Table 14 Radio Antenna Connection Interface Characteristics

Connector Type	RF Cable Type
NEX10 female	50 Ω 1/2-inch coaxial, 4.3-10 male

Table 15 Radio Antenna Cable Connectors

Radio Connectors	Antenna Connectors
 A (Antenna A)	TX/RX
 B (Antenna B)	TX/RX
 C (Antenna C)	TX/RX
 D (Antenna D)	TX/RX

### 5.1.2 Interface for Optical Cable to Radio 4408 Unit

The  1 and  2 interfaces provide connections to optical cables (with outer diameter 4.5–5.5 mm, and comply with standard G657A2) for traffic and timing signals between the radio and the main unit. An SFP is used to connect the optical cable to the radio.

**Note:** The radio uses SFP modules for optical transmission and optical radio interfaces on Data 1 and Data 2.

Only SFP modules approved and supplied by Ericsson must be used. These modules fulfill the following:

- Compliance with Class 1 laser product safety requirements defined in standard IEC 60825-1
- Certification according to general safety requirements defined in standard IEC 60950-1
- Functional and performance verified to comply with Radio System specifications

Recommended SFP modules are obtained from the product packages for the Radio System and the Main Remote Installation products. For more information about SFP modules, see Spare Parts Catalog and Site Installation Products Overview.

### 5.1.3 DC Power Interface

The radio DC power connector provides Radio 4408 with +36 V DC and internal communication from the PSU.



## 6 Standards and Regulations

This section presents a brief overview of standards, regulatory product approval, and declaration of conformity for the radio.

### Declaration of Conformity

*"Hereby, Ericsson AB, declares that this product is in compliance with the essential requirements and other relevant provisions of Radio Equipment Directive 2014/53/EU and RoHS Directive 2011/65/EU and Radio Equipment Regulations 2017 and RoHS Regulations 2012. The full text of the declaration of conformity is available at the following internet address: <https://portfolio.ericsson.net/c/FGB1010529>."*

### 6.1 Regulatory Approval

The Radio System complies with the following market requirements:

- EU market requirements, Radio Equipment Directive 2014/53/EU  
The apparatus may include radio transceivers with support for frequency bands not allowed or not harmonized within the EC.
- UK market requirements, Radio Equipment Regulations 2017 and Radio Equipment Directive 2014/53/EU
- North American market requirements
- Products containing radio equipment outside North America and in countries not recognizing the CE-mark can be labeled according to national requirements or standards

#### 6.1.1 Environmental Standards Compliance

The product complies with the following environmental standard:

##### EU

- RoHS Directive 2011/65/EU

##### UK

- RoHS Regulations 2012 and RoHS Directive 2011/65/EU

#### 6.1.2 Safety Standards Compliance

In accordance with market requirements, the Radio System complies with the following product safety standards and directives:

##### International

- IEC 62368-1

##### EU and UK

- EN 50385
- EN 62368-1

## North America

- FCC CFR 47 Part 1.1310
- FCC CFR 47 Part 2.1091
- Health Canada Safety Code 6
- IC RSS-102
- UL 62368-1
- CSA-C22.2 No. 62368-1

### 6.1.2.1 Outdoor-Specific Requirements

The Radio System complies with the following outdoor-specific requirements:

#### International

- IEC 60529 (IP65)
- IEC 60950-22

#### EU and UK

- EN 60529 (IP65)
- EN 60950-22

#### North America

- CAN/CSA-C22.2 No. 60950-22
- CAN/CSA-22.2 No.94.2-15 Ed.2
- UL 50E
- UL 60950-22

### 6.1.3 EMC Standards Compliance

The Radio System complies with the following Electromagnetic Compatibility (EMC) standards:

#### International

- 3GPP TS37.113
- 3GPP TS38.113

#### EU and UK

- ETSI EN 300 386
- ETSI EN 301 489-1
- ETSI EN 301 489-50

#### North America

- IC ICES-003 B
- FCC CFR 47 Part 15 B

## 6.1.4 Radio Standards Compliance

The Radio System complies with the following radio standards:

### International

- 3GPP TS37.141
- 3GPP TS38.141-1

### EU and UK

- ETSI EN 301 908-1
- ETSI EN 301 908-18

### North America

- FCC CFR 47 Part 2
- FCC CFR 47 Part 27
- IC RSS-Gen
- IC RSS-192

## 6.1.5 Marking

To show compliance with legal requirements, the product is marked with the following labels:

### EU

- CE mark
- WEEE symbol

### UK

- UKCA mark (for Great Britain)
- CE mark (for Northern Ireland)
- WEEE symbol

### USA

- FCC CFR 47 Part 15 Compliance Statement:  
“This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
  - This device may not cause harmful interference.
  - This device must accept any interference received, including interference that may cause undesired operation.”
- cETLus
- FCC ID

### Canada

- ISED IC-003 Compliance statement: “CAN ICES-3 (B)/NMB-3(B)”
- cETLus

- ISED Certification Number and HVIN (IC ID)

## 6.2 Other Standards and Regulations

The standards and regulations in this section are not regulatory approved.

### 6.2.1 Spare Parts

The product adheres to the Ericsson Serviceability and Spare Part Strategy.

### 6.2.2 Surface Quality

The surface quality of the radio is in accordance with Ericsson standard class A3.

Legal | © Ericsson AB 2023

Copyright	© Ericsson AB 2023. All rights reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.
Disclaimer	The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.
Trademarks	All trademarks mentioned herein are the property of their respective owners. These are shown in the document Trademark Information.